

### Digital Compression Load Cell



#### FEATURES

- Capacities: 10 - 100 ton
- Digital output via RS-485 or RS-422 interface
- Low profile, multi-column, stainless steel construction
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 4000d
- Multiple-range versions available
- Internal diagnostics and lightning protection
- 240,000 counts resolution
- Maximum transmission distance 1200m

#### DESCRIPTION

The SCC is a multi-column, low profile, stainless steel, compression load cell with a digital output signal.

This digital output enables the user to communicate with each SCC independently of the others in the system, thus offering advantages in system setup, system control, corner correction, fault finding and load cell replacement.


Suitable applications for this product include various types of road and rail weighbridges, and process weighing.

This product meets the stringent Weights and Measures requirements throughout Europe.

#### APPLICATIONS

- Weighbridges
- Silo hopper weighing

#### OUTLINE DIMENSIONS in mm

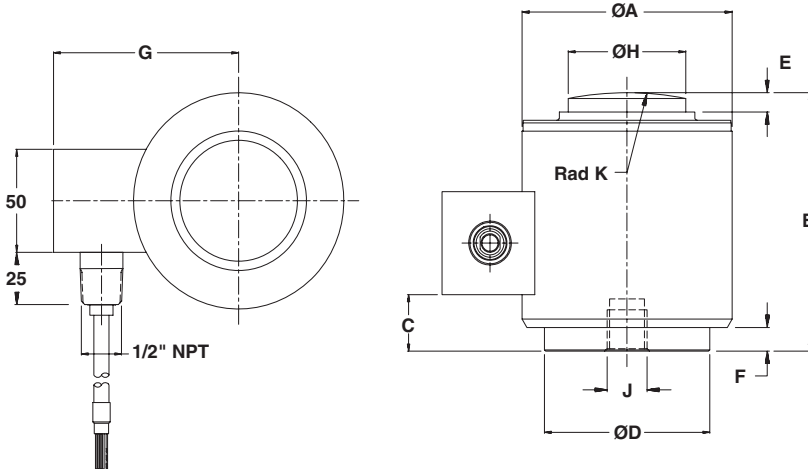

Cable specifications:

Cable length: 10 meters for 10t  
20 meters all others

- Excitation + Green
- Excitation - Black
- Rx + Yellow
- Rx - Blue
- Tx + Red
- Tx - White
- Shield Clear

Note: Dimensions are in millimeters

Capacity (t)	10, 25	40, 60	100
A	73.0	105.0	152.4
B	82.5	127.0	184.2
C	7.0	29.0	67.5
D	58.0	82.5	123.8
E	6.5	8.0	23.6
F	1.8	11.0	21.8
G	79.5	99.0	124.8
H	31.8	58.7	79.2
J	M12x1.75 (11 Deep)	M20x2.5 (20 Deep)	
K Rad	152.0	152.0	432.0

**SPECIFICATIONS**

PARAMETER	VALUE			UNIT
Standard capacities ( $E_{max}$ )	10, 25, 40, 60, 100			ton
Accuracy class according to OIML R-60	CC	C3	C4	
Maximum no. of verification intervals (n)		3000	4000	
Minimum verification interval ( $V_{min}=E_{max}/Y$ )		$E_{max}/10000$	$E_{max}/10000$	
Minimum verification interval, type MR		$E_{max}/20000$	$E_{max}/20000$	
Rated output (FSO)	240,000			counts
Tolerance on rated output	200			±counts
Zero balance	200			±counts
Combined error	0.0500	0.0200	0.0173	±% FSO
Non-repeatability	0.0200	0.0100	0.0090	±% FSO
Minimum dead load output return	0.0500	0.0167	0.0125	±% FSO
Creep error (30 minutes)	0.0600	0.0245	0.0184	±% FSO
Temp. effect on min. dead load output	0.0250	0.0070	0.0070	±% FSO/5°C
Temp. effect on min. dead load output MR		0.0035	0.0035	±% FSO/5°C
Temperature effect on sensitivity	0.0250	0.0050	0.0040	±% FSO/5°C
Compensated temperature range	-10 to +40			°C
Operating temperature range	-40 to +80			°C
Storage temperature range	-40 to +90			°C
Maximum safe over load	150			% $E_{max}$
Ultimate over load	400			% $E_{max}$
Maximum safe side load	10			% $E_{max}$
Deflection at $E_{max}$	0.36 max			mm
Excitation voltage	12.5 to 18.0			Vdc
Maximum excitation voltage	15			Vdc
Maximum current consumption	80			mA
Start up current	150			mA
Insulation resistance	>5000			MΩ
Element material (DIN)	Stainless steel 1.4542			
Sealing (DIN 40.050 / EN60.529 / IEC 529)	IP66 and IP68			
Signal update per second	25			
Baudrate	9600			Bits/s
Transmission type	Asynchronous serial transmission			
Start bits	1			
Data bits	7			
Stop bits	1			
Parity	Odd			
Maximum transmission cable length	1200			m
Data transmission interface	RS422 (4 communication wires)/RS485 (2 communication wires)			

FSO - Full Scale Output