

## Double-Ended Link Shear Beam

### FEATURES

- Capacities 25k–125k lbs
- Center-mounted with double-linked shear beam design
- Free of horizontal movement
- Insensitive to side load
- Electroless nickel-plated alloy tool steel
- NTEP Class III L 10000 for whole series
- **Optional**
  - Surge protection optional for 60k lbs
  - FM approval available

### APPLICATIONS

- Truck/rail scales
- Silo/hopper/tank weighing
- Fork-lift scales

### DESCRIPTION


DLB is designed to be center-mounted with double-linked loading. This design provides free movement in



all horizontal directions virtually eliminating binding or friction points. The Shear Beam design gives excellent performance for high capacity loading.

DLB is constructed of alloy steel and fully potted sealed with special chemical compounds to IP67 providing excellent protection against moisture and humidity.

### OUTLINE DIMENSIONS

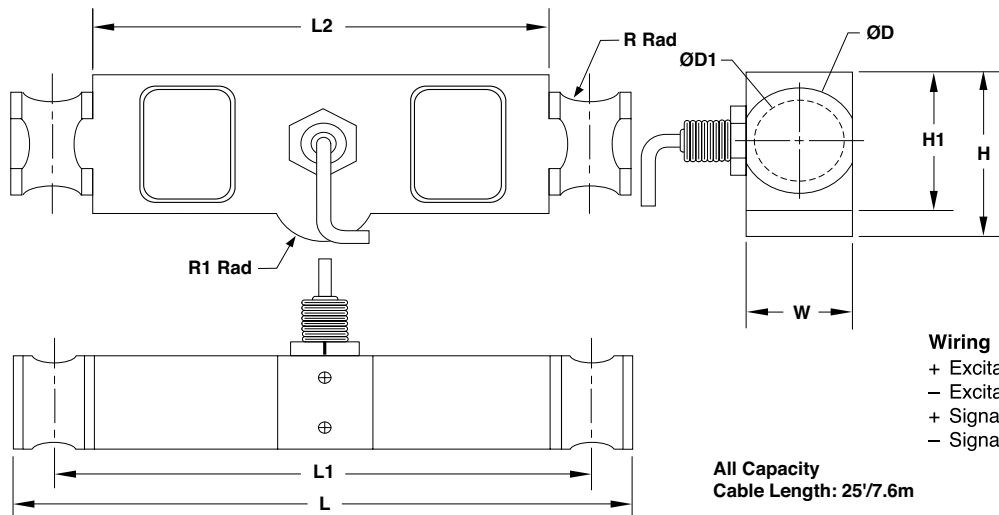

CAPACITY		L	L <sub>1</sub>	L <sub>2</sub>	W	H	H <sub>1</sub>	D	D <sub>1</sub>	R	R <sub>1</sub>
25k/40k lbs	mm	209.6	184.2	158.8	49.3	75.5	62.0	50.8	41.4	12.7	12.7
	(inch)	8.25	7.25	6.25	1.94	2.97	2.44	2.00	1.63	0.50	0.50
50k/60k/75k lbs	mm	292.1	254.0	215.9	49.3	88.2	74.7	55.9	43.2	19.1	25.4
	(inch)	11.50	10.00	8.50	1.94	3.47	2.94	2.20	1.70	0.75	1.00
100k/125k lbs	mm	368.3	317.5	266.7	73.7	118.9	98.0	81.3	62.0	25.4	38.1
	(inch)	14.50	12.50	10.5	2.90	4.68	3.86	3.20	2.44	1.00	1.50

## Double-Ended Link Shear Beam

<b>SPECIFICATIONS</b>			
<b>PARAMETER</b>	<b>VALUE</b>		<b>UNIT</b>
<b>NTEP/OIML accuracy class</b>	NTEP IIIIL	Non-Approved	
<b>Maximum no. of intervals (n)</b>	10000 multiple		
<b>Y = E<sub>max</sub>/V<sub>min</sub></b>	14000	5000	Maximum available
<b>Standard capacities (E<sub>max</sub>)</b>	25k, 40k, 50k, 60k, 75k, 100k, 125k		lbs
<b>Rated output—R.O.</b>	3.0		mV/V
<b>Rated output tolerance</b>	0.25		±% of rated output
<b>Zero balance</b>	1		±% of rated output
<b>Non-linearity</b>	0.025		±% of rated output
<b>Hysteresis</b>	0.025		±% of rated output
<b>Non-repeatability</b>	0.02		±% of rated output
<b>Creep error (20 minutes)</b>	0.030		±% of rated output
<b>Zero return (20 minutes)</b>	0.030		±% of rated output
<b>Temperature effect on min. dead load output</b>	0.0010	0.0026	±% of rated output/°C
<b>Temperature effect on sensitivity</b>	0.0010	0.0015	±% of applied load/°C
<b>Compensated temperature range</b>	-10 to +40		°C
<b>Operating temperature range</b>	-20 to +60		°C
<b>Safe overload</b>	150		% of R.C.
<b>Ultimate overload</b>	300		% of R.C.
<b>Excitation, recommended</b>	10		VDC or VAC RMS
<b>Excitation, maximum</b>	15		VDC or VAC RMS
<b>Input impedance</b>	770±10		Ω
<b>Output impedance</b>	700±5		Ω
<b>Insulation resistance</b>	>5000		MΩ
<b>Construction</b>	Nickel-plated alloy steel		
<b>Environmental protection</b>	IP67		

All specifications subject to change without notice.

FM Approval

Intrinsically Safe: Class I, II, III; Div. 1 Groups A-G

Non-Incendive: Class I; Div. 2 Groups A-D