WCR-20t传感器

SPECIFICATIONS:

Standard Capacity	20t		
Recommended Excitation	10 V AC/DC	Compensated Temp. Range	-10℃ to +40℃
Maximum Excitation	15 V AC/DC	Operating Temp. Range	-20℃ to +200℃
Output at Rated Load	2 mV/V ±0.25 %	Zero Balance	±1%
Hysteresis Error	0.03%	Input Resistance	385±5 Ω
Non Linearity	0.03%	Output Resistance	350±5 Ω
Non Repeatability	0.02%	Insultaion Resistance (50VDC)	>5000 MΩ
Creep (30 minuties)	0.03%	Safe Overload	150%
Zero Return (30 minutes)	0.03%		
Temp. Effect/ 10℃ on Span	0.015%		
Temp. Effect/ 10℃ on Zero	0.026%		

OUTLINE:

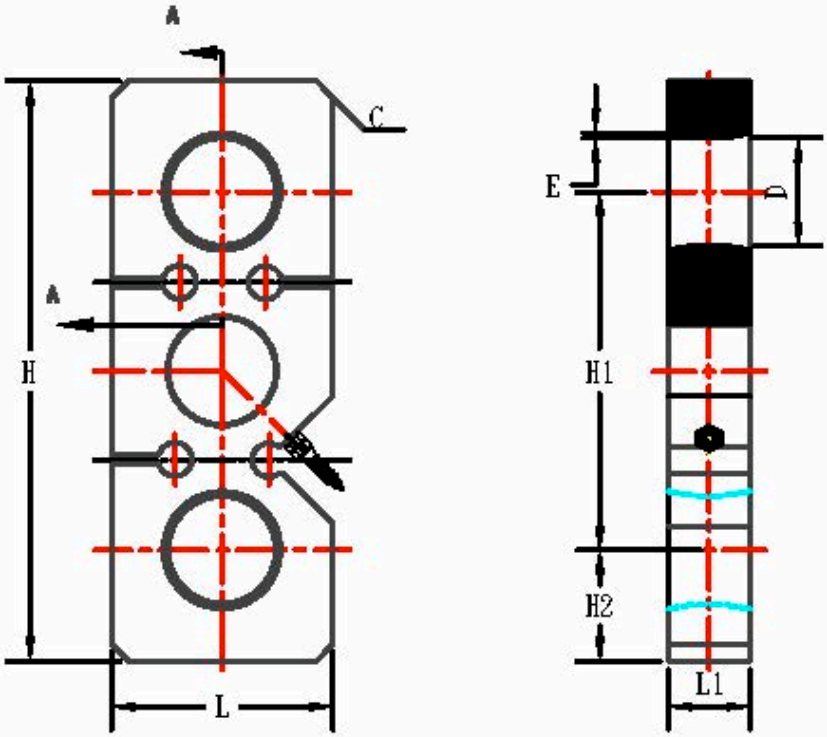

DIMENSIONS:

CAPACITY		DIMENSIONS L	L1	H	H1	H2	C	D	E
20t	(mm)	130.0	48.0	340.0	210.0	65.0	10x45°	**ø63.0**	3.0
	(inch)	5.12	1.89	13.39	8.27	2.56	0.39x45°	**ø2.48**	0.12